

DTW ~ Waste Discharge Pump


Voltage:

12VDC

24VDC

Part No:


01582

01583

Dimensions

A	B	C	D	E	F
349	197	95	171	127	48

Dimensions in mm

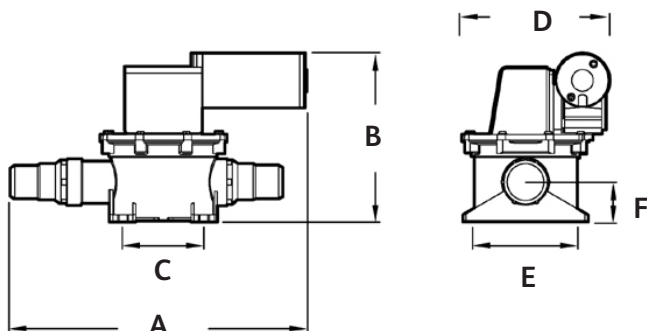

DOMETIC

Mobile living made easy.

T-Series Discharge Pump Runs dry without harm - for Holding Tank System

Unlike impeller macerator pumps, our unique bellows pump can run dry without damage.

Draws only 6 amps at 12-volt DC.

Self-priming up to 3.3 meters of water.
Handles up to 1022 litres per hour.

Bellows pump 38mm (1½") 12 and 24 Volt
For large private and small charter boats. Good soft solids handling capability.

Performance in solids handling equals 38mm diaphragm pump with improved reliability. Longer action provided by Bellows induces greater fluid movement per stroke. Reduced valve movement equals reduced valve failure.

Horizontal pumping, by duckbill inlet and outlet valves, for convenient and low profile installation.

Technical Specifications

Waste Inlet / Outlet	38mm
Waste Flow Rate	19 litres per minute
Electric Consumption:	6 Amps (12VDC) 3 Amps (24VDC)
Fuse / Breaker	10 Amps (12VDC)
Weight	3.2 Kg