

Flexible Impellor Pump

xylem
 Let's Solve Water



Bronze Flexible Impeller Utility Pump

Suitable for Super Yachts and Charter Craft. Unmacerated waste and tissue is easily handled. Passes hard objects up to 10 mm diameter. Connects to 38 mm (1½") suction and discharge. Will run dry for up to 30 mins. Light in weight and intended for "light duty" quayside application where a small electrically operated system is required. Being hand portable, suction lift can be easily kept to a minimum and the pump has a strong draw through up to 15 metres of 38mm pump-out hose.

Features

- Self prime from dry up to 3 metres
- Flows up to 80 litres per minutes
- Pressure up to 2 bar
- Handles hard or soft solids
- Tolerates abrasive water
- Non pulsating flow
- Handles viscosities up to 500 centipoise
- Uses standard IEC motor
- Dry running capability for 30 minutes, post operation.



Technical Specifications

Voltage	240VAC
Power	550 Watts
Fuse Size	13 Amps
Amp Draw Running	4.4 Amps
Ports:	Inlet 38mm 1½" BSP Outlet 38mm 1½" BSP
Max Horizontal Pipe Run at No Head	100 Meters
Dry Prime Lift	1.7 Meters
Flow Rate at 2 M head	50Litres / Minutes
Total Head	10 Meters
Weight	16 Kg
Fitted with 2m long supply cable	



Part No: **240VAC**
 Pump **01477**

Dimensions

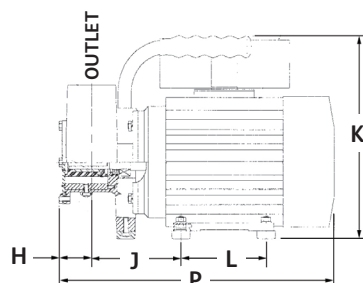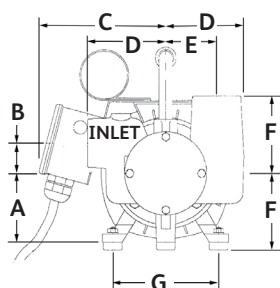

Dimensions in mm

A	80	G	125
B	35	H	38.5
C	150	J	105
D	92	K	236
E	60	L	100
F	90	P	323

Performance

