

Low Voltage Waste Pump

xylem
 Let's Solve Water



Diaphragm Waste Evacuation Pump

Handles sink, shower and black waste

- 1½" ports for good solids handling ability
- Multi-positional ports for truly flexible installation
- Robust, quiet, single diaphragm design
- Single diaphragm design allows extended dry running
- No strainer required.
- Self-primes up to 3m vertical lift
- Rated for up to 30 minutes continuous running






Technical Specifications

Voltage	12VDC	24Vdc
Fuse Size	10 Amps	5 Amps
Max Current Draw	8 Amps	2.5 Amps
Wiring Size / Max Lengths	2.5mm ² / 4.5m 4mm ² / 10m 6mm ² / 15m	2.5mm ² / 15m
Ports:	Inlet Outlet	38mm 1½" BSP 38mm 1½" BSP
Max Discharge Head	4 Meters	
Dry Prime Lift	3 Meters	
Open Water Flow Rate	19 Litres / Minutes	
Weight	5 Kg	

Part No:	12VDC	24VDC
Pump	02965	02977

Dimensions

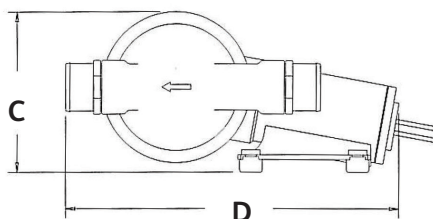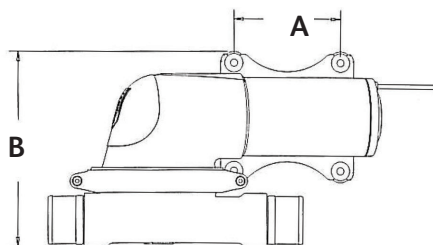

A	B	C	D	E	F
89	161	132	278	70	89

Dimensions in mm