

# **SN32 Comfort**




Part No: 12VDC 24VDC
Toliet 03555 03556

### **Dimensions**

A B C D E

365 430 320 370 255

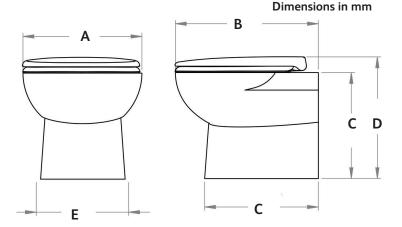

#### Note:

Salt water flush requires an additional, raw water pressure pump.

# Saniflo MARINE RANGE

### Pumped Electric, Macerator Toilet

Reliable and comfortable, just like a conventional toilet, the **Sanimarin 32** can be easily installed on a vertical wall. Thanks to its light weight and small size, it is easy to integrate in all areas, and above all, it easily replaces toilets with manual pumps.

Discharge is through conventional 1" - 1½" hose. Exceptionally easy to install with fresh water for flushing supplied by connection into the boat's water pressure system.

Will discharge to a higher head than most other toilets.

• Rocker Switch Operation (Two Position)

Add water: bowl flush command Pump out: macerate and empty command

Minimal Routine Maintenance

- Easy to Clean
- Very Quiet
- 2 Year Guarantee

## **Technical Specifications**

Water Consumption 1.2 to 2.4L
Water Pressure 20 - 45 PSI
Water Connection 3/4" BSP
Waste Outlet 1" or 11/2"

Waste Outlet 1" or 1½" (25 or 38mm)


Electric Consumption: 12 Volt 20 Amps

24 Volt 10 Amps

**Start-up-surge:** 12 Volt 133 Amps

24 Volt 69 Amps 12 Volt Motor 260 Watts 24 Volt Motor 260 Watts

Weight 16.4 Kg



















Wharf Road. Fenny Compton Warwickshire, CV47 2FE

Sales: 01295 770000 E: sales@leesan.com W: leesan.com

Company Reg No: 2332435 VAT Reg No: 522 1528 81

