

Gulper 320 Bilge Pump cw Strainer



Easy Access Remote Mount Bilge Pump High, Dry and Protected - remote mounted for easy inspection

No clog, no filter waste pump built on more than a decade of market leading pump technology

Easy Access and Product Protection

- Meets requirement for primary bilge pump for boats up to 12m length
- Ideal where bilge space is limited
- Long life high, dry and protected


Technical Specifications

	12v	24v
Rec. Fuse Size	10 Amps	5 Amps
Lift Max. Suction Lift	3m	3m
Max. Discharge Head	3m	3m
Max Dis'ge Head & Suction Lift	4m	4m
Hose Connections	19/25mm	19/25mm
Weight	1.6Kg	1.6Kg


Performance Data:

Suction Lift	0m	0m	1m	1m
Discharge Head	1m	1m	1m	1m
Hose Size	19mm	25mm	19mm	25mm
Flow Rate / Minute	19ltrs	17.5ltrs	17.4ltrs	15.5ltrs
Current Draw (12Vdc)	7.5amps	8 amps	7.5 amps	8 amps
Current Draw (24Vdc)	3.25 amps	4 amps	3.25 amps	4 amps

Typical Installations

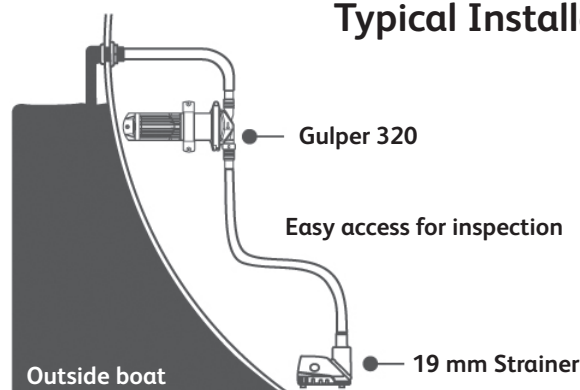

Dimensions

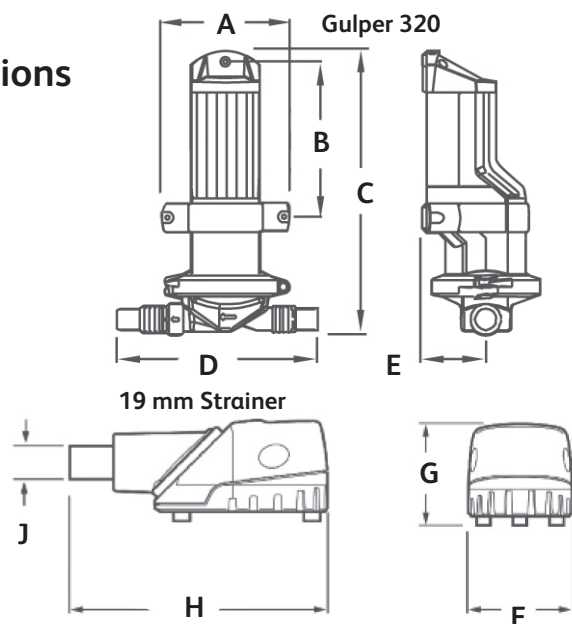

A	B	C	D	E	F	G	H	J
110	156	280	198	63	60	57	148	19

Dimensions in mm